

Compost turner **DACHS HP 2.2/2.5/2.8**

Attachment for tractors for active conversion of compost and soils, etc.

The HP compost turner is designed to be mounted on a 3-point system (CAT II or CAT III) for tractors with an output of approx. 50-120 hp. The turner is driven by the tractor PTO (540 rpm). The rotor then rotates at 180 rpm.




The HP compost turner is designed to be mounted on a 3-point system (CAT II or CAT III) for tractors with an output of approx. 50-120 hp. The turner is driven by the tractor PTO (540 rpm). The rotor then rotates at 180 rpm.

For transport on the road, the machine can be hydraulically swivelled upwards.

Compost-Turner Parameters

	HP 2.2	HP 2.5	HP 2.8
A-total high of work	1.450mm	1.700mm	1.700mm
B-Rotor width	2.200mm	2.500mm	2.800mm
C-total width transport	2.050mm	2.050mm	2.030mm
D-total high transport	3.430mm	3.730mm	3.750mm
height of the platform	1.300mm	1.300mm	1.500mm
Length of the bridge	1.000mm	1.000mm	1.200mm
Rotor diameter	Ø614mm	Ø614mm	Ø614mm
Rotor rotation	180 1/min	180 1/min	180 1/min
Machine weight	1.100kg	1.200kg	1.320kg

Working position:

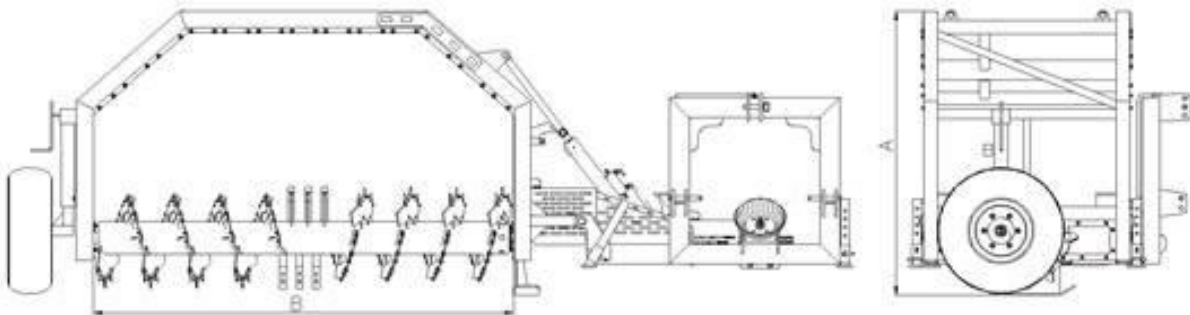

Transport position:

