


## technical data / delivery volume

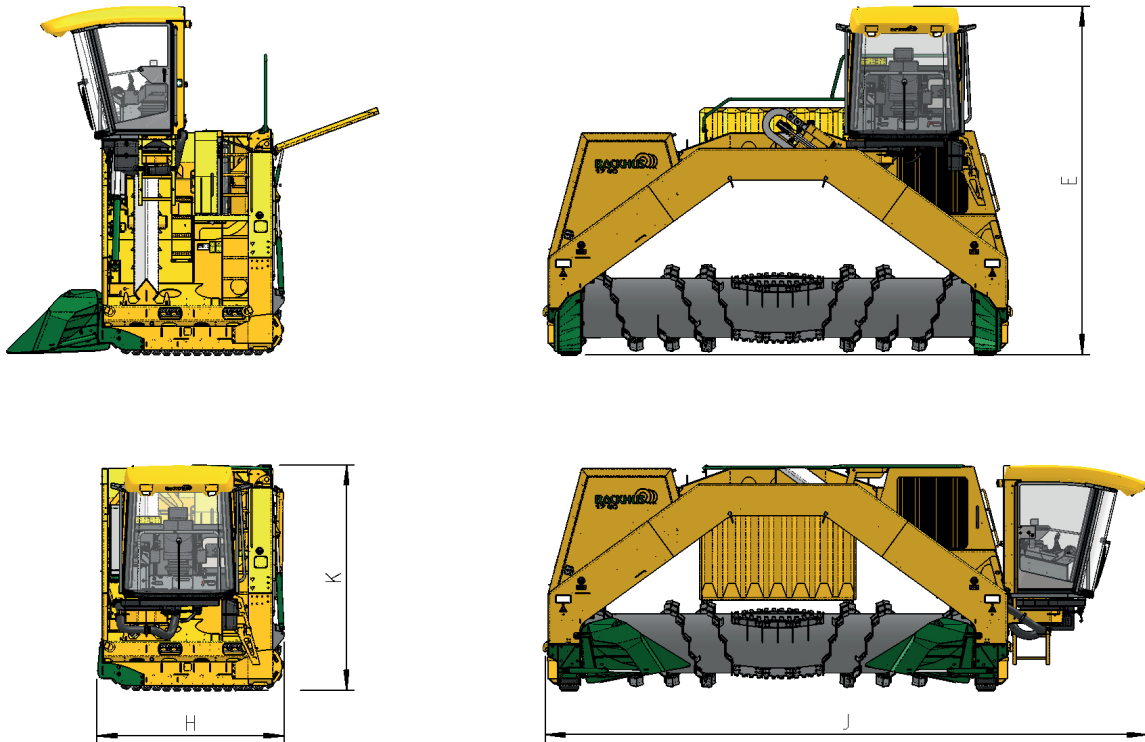

BACKHUS			17.50	17.55	17.60
<b>Dimensions</b>					
transport length	H	mm	2.550	2.550	2.550
transport width	J	mm	7.550	8.050	8.550
transport height	K	mm	3.200	3.200	3.200
weight up to		t	11 - 13	12 - 14	13 - 15
maximum ground pressure		kg/cm <sup>2</sup>	1,44	1,56	1,67

### Lift frame

welded steel frame  
corrosion-resistant 2-color lacquer coating  
RAL1004 golden yellow and RAL6029 mint green  
Steel surfaces (except wear areas)  
Sa 2 1/2 blasted with DIN EN ISO 12944-4  
Coating in accordance with DIN EN ISO 12944-5  
Category C2  
Coat thickness 120µm (except powder coated areas)

### Panorama-ease and convenience cabin

adjustable spring born seat for driver  
arm rests with operating elements

one-lever steering with joystick  
CD/MP3/radio mounting kit with 2 stereo loudspeakers  
cabin filter according to G4 (EU4)  
according to DIN EN 779 (DIN 24 185)  
warm water heating with three-stage ventilation  
automatic air-conditioning system, cooler compartment  
side window can be opened  
2 halogen head lamps in cabin roof  
sun protection front and back  
hydraulically infinitely variable height-adjustable  
Machine in every cabin position mobile  
entrance and exit in every position possible