BACKHUS A 50-A 55 mobile

Technical data / delivery volume

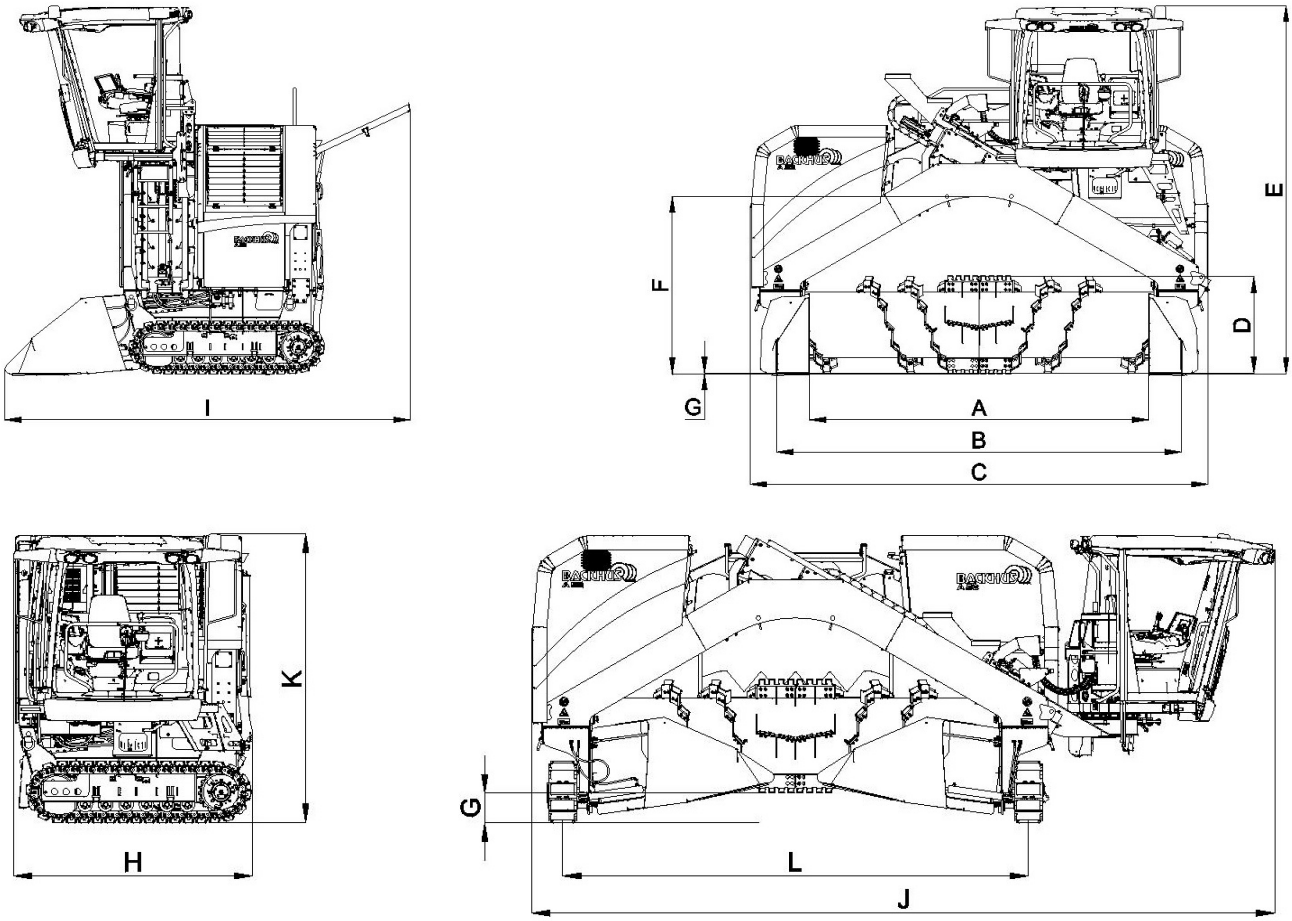

Figure similar

BACKHUS			A 50	A 55
Dimensions				
height	E	mm	4,600	
transport width	H	mm	2,550	
transport length	J	mm	8,000	8,500
transport height	K	mm	3,100	
weight up to		t	15	15.5
maximum ground pressure		kg/cm²	1.4	1.45

Frame
box construction
corrosion-resistant 2-color lacquer coating
- Steel surfaces (except wear areas)
- Sa 2 1/2 blasted with DIN EN ISO 12944-4
- Coating in accordance with DIN EN ISO 12944-5
- Category C2 (except powder coated areas)
- Coat thickness 120µm

Panorama-ease and convenience cabin
infinitely adjustable air ride seat for driver
- Arm rests with operating controls
- one-lever steering with joystick

Generous interactive 12.1“ TFT touchscreen
- Details of machine status
- BACKHUS DIAGNOSTIC MANAGEMENT (BDM)
- Complete user manual

bluetooth radio with CD receiver
bluetooth phone connection possible
cabin filter according to G4 (EU4)
- according to DIN EN 779 (DIN 24 185)

warm water heating with three-stage ventilation
automatic air-conditioning system
side window can be opened
all around sun protection
hydraulically height adjustment

Content, technical data and illustrations of this edition are non-committal and can be changed without prior notice of manufacturer. With reference to protection notice ISO 16016.